



PV Clamp (Stainless 304)

ชุดจับยึดหลังคาซีเมกัลซีทและกระเบื้องลอนคู่

รายละเอียดอุปกรณ์ติดตั้งโซลาร์เซลล์


รหัสสินค้า	C26
ชื่อสินค้า	PV Clamp (Stainless 304)
วัสดุ	สแตนเลส 2B SUS 304 1.2x45x610 มม.
ค่าความแข็งของสแตนเลส	185 HV
แรงดึง	96.45 แรงกิโลกรัม
แรงกด	100.60 แรงกิโลกรัม
น้ำหนัก	0.225 กิโลกรัม/ชิ้น
ขนาดบรรจุภัณฑ์	20 ชิ้น/กล่อง ขนาดกล่อง 185x185x490 มม.

คุณสมบัติเด่น


- ติดตั้งง่าย
- วัสดุทำมาจากสแตนเลส 304
- สะดวก รวดเร็ว

ขนาด


(หน่วย : มิลลิเมตร)

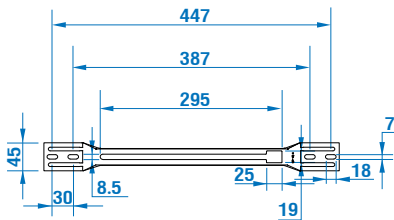

ด้านบน



ด้านหน้า

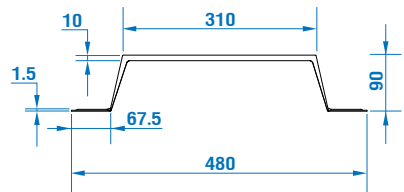

ด้านข้าง



Thai-German Institute
สถาบันไทย-เยอรมัน

สถาบันไทย-เยอรมัน 2003 หมู่ที่ 1 ถนนสุขุมวิทซอย 10 แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10110
Thai-German Institute 7001 Moo.1 Amphursoe Industrial Estate Bangso-Trail KM.37 Tambol Klong Tanoo Amphur Maung Chantoo 20009
Tel. 038-215033-44 Fax. 038741705 http://www.tgi.or.th

TEST REPORT

Received No.: 68-11-020

Report No.: TGI-TS-005

Rev.: 00

Customer's company name: **PSI Corporation Co., Ltd.**

Address: **2 Soi Ramkhamhaeng 159, Rat Phatthana, Saphansung, Bangkok 10240 Thailand.**

Test Product:	-	Material Characterization:	-
Part Name:	PV CLAMP SUS304	Standard of Test:	As Customer Request
Part No.:	01,02,03	Type of Test:	Tensile Testing
Lot No.:	-	Equipment / Serial No.:	Universal Testing Machine
Material Specification	-	Equipment's Capacity:	10 Tons
Received Date:	05 / Nov. / 2025	Ambient Temp.:	21.6 °C, 59 % RH
Tested Date:	06 / Nov. / 2025		



Result of Tensile test

Test No.	Max. Load (N)	Max. Load (kgf)
01	946.137	96.446
02	1,144.393	116.655
03	779.745	79.484

Operated by: *Chainarong*
Testing Operator
Technical Team
(06 / Nov. / 2025)

Reviewed by: *[Signature]*
Mr.Kriangkrai Kaewko
Technical Manager
(06 / Nov. / 2025)

Approved by: *[Signature]*
Mr.Weerasak Thaottho
Quality Manager
(06 / Nov. / 2025)

Commentary:

- Our division and institute not allow to change, add or subtract anywhere on this report, except only in case of already accepted by writing from our division.
- Our division can not confess to any direct or indirect damage that will occur after this by using data, analysis results, results or conclusion in this report to design, produce or others.
- Experiment results are exactly true especially only on specimen that was carried to test.
- "Test marked * in this report are not included in the TISI Accreditation Schedule for our Laboratory"



Thai-German Institute
สถาบันไทย-เยอรมัน

สถาบันไทย-เยอรมัน 700/1 มอ.1 อุตสาหกรรมอินดустรี เอสมา บางนา-ตราด KM.17 ตำบล คลัง ต.นาเกลือ อำเภอ เมือง ชลบุรี 20009
Thai-German Institute 700/1 Moo.1 Automotive Industrial Estate Bangna-Trad KM.17 Tumbul Klang Tams Amphur Muang Choburi 20009
Tel. 010-215033-44 Fax. 010747505 http://www.tgi.or.th

TEST REPORT

Received No.: 68-11-020
Report No.: TGI-CT-003
Rev.: 00

Customer's company name: **PSI Corporation Co., Ltd.**

Address: **2 Soi Ramkhamhaeng 159, Rat Phatthana, Saphansung, Bangkok 10240 Thailand.**

Test Product:	-	Material Characterization:	-
Part Name:	PV CLAMP SUS304	Standard of Test:	As Customer Request
Part No.:	01,02,03	Type of Test:	Compression Testing
Lot No.:	-	Equipment / Serial No.:	Universal Testing Machine
Material Specification	-	Equipment's Capacity:	10 Tons
Received Date:	05 / Nov. / 2025	Ambient Temp.:	21.6 °C, 59 % RH
Tested Date:	06 / Nov. / 2025		



Result of Compression test

Test No.	Max. Load (N)	Max. Load (kgf)
01	990.833	101.002
02	986.851	100.596
03	947.023	96.536

Operated by: Chainarong
Testing Operator
Technical Team
(06 / Nov. / 2025)

Reviewed by: Mr.Kriangkrai Kaewko
Technical Manager
(06 / Nov. / 2025)

Approved by: Mr.Weerasak Thaotho
Quality Manager
(06 / Nov. / 2025)

Commentary:

- Our division and institute not allow to change, add or subtract anywhere on this report, except only in case of already accepted by writing from our division.
- Our division can not confess to any direct or indirect damage that will occur after this by using data, analysis results, results or conclusion in this report to design, produce or others.
- Experiment results are exactly true especially only on specimen that was carried to test.
- "Test marked * in this report are not included in the TISI Accreditation Schedule for our Laboratory"